



iPad 3 4G SIM Board Ribbon Cable Replacement


Written By: Walter Galan



INTRODUCTION

Internal Prereq.

Step 1 — SIM Board Ribbon Cable

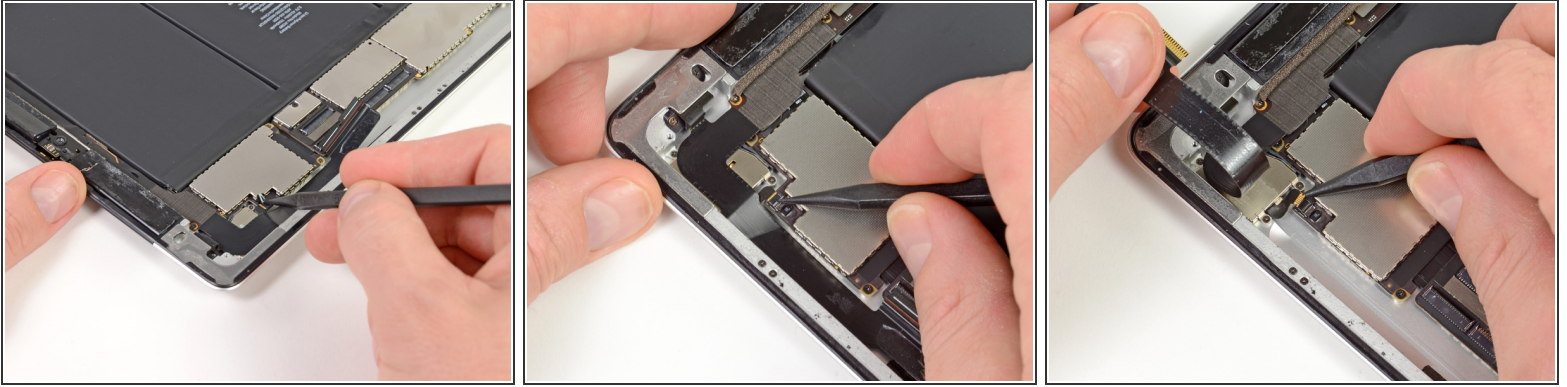

- Peel back and remove the piece of tape covering the SIM board cable ZIF connector.
- Flip up the retaining flap on the SIM board cable ZIF connector.
- Using the tip of a spudger, pull the SIM board cable straight out of its socket on the logic board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 09:18:43 PM.